

CARBON WHEEL TECHNOLOGY. Handmade in Austria




XeNTIS
carbon wheel technology

2017



 **CARBON WHEEL TECHNOLOGY.**



Handmade in Austria

INHALT / CONTENT

04-06 XeNTiS CARBON TECHNOLOGIE
XeNTiS CARBON TECHNOLOGY

07-09 XeNTiS NABEN
XeNTiS HUBS

10-11 XeNTiS TRIA PRODUKTE
XeNTiS TRIA PRODUCTS

12-17 XeNTiS ROAD PRODUKTE
XeNTiS ROAD PRODUCTS

18-20 XeNTiS MTB PRODUCTS
XeNTiS MTB PRODUCTS

21-23 XeNTiS ERSATZTEILE
XeNTiS SPARE PARTS

24-25 XeNTiS IN SPORTS
XeNTiS IN SPORTS

26-27 XeNTiS SPORTSWEAR
XeNTiS SPORTSWEAR



Carbon Technologie aus der österreichischen Edelschmiede

Es gibt ein Material, das mehr leistet als andere. Ein Hochleistungswerkstoff, mit dem ein Unternehmen arbeitet wie kaum ein anderes. XeNTiS fertigt aus Carbon Wheels und Komponenten. In unnachahmlicher Form und Funktion.

XeNTiS ist mit dem Anspruch angetreten, neue Maßstäbe im Bau von Wheels und Komponenten zu setzen. Jahrelanges Know-how im Umgang mit Carbon fließt in die größtenteils manuelle Fertigung ein.

Unverzichtbar sind dabei die Erfahrungen erfolgreicher Athleten. Sie treiben die permanente (Weiter) Entwicklung von Wheels und Komponenten voran. So wurde die Squad Silver Line Linie in Zusammenarbeit mit dem besten österreichischen Radrennsteam (Team Felbermayr-Simplon Wels) realisiert.

Die Umsetzung erfolgt mittels CAD und FE Berechnungssysteme. Prototypen werden konstruiert und analysiert.

Erst wenn die entsprechenden Ergebnisse vorliegen, kommen die neuen Wheels zu den computergestützten Aerodynamik Tests, die abschließend mit Ergebnissen des Prototypen aus dem Windkanal überprüft werden.


Carbon Technology from the Austrian high end manufacturer

There is a material that performs better compared to others. It is a high-end performance material that a company uses unlike any other. XeNTiS produces carbon wheels and components.

XeNTiS claims to set new standards in the construction of carbon wheels and components. Many years of expertise in dealing with carbon flows into the largely hand crafted production lines. Essential are also the experiences of successful athletes as they are the drive behind the permanent development of XeNTiS wheels and components. The Squad Silver Line was the result of a close cooperation with leading Austrian-racing Team Felbermayr - Simplon Wels.

The implementation takes place by means of CAD and FE calculation systems, then prototypes are constructed and further analyzed.

Only when the relevant results meet or exceed expectations, the wheels go to the computerized aerodynamic test bench and finally the results are directly compared to the results of the prototypes in the wind tunnel.

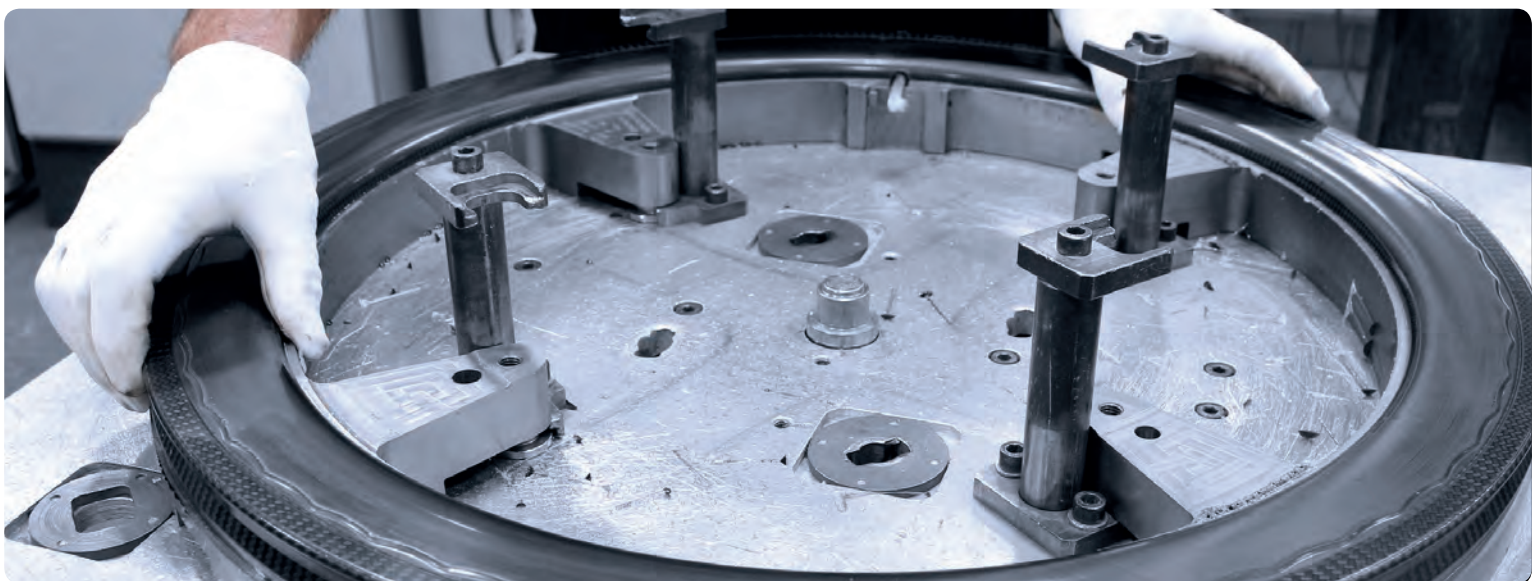

PATENTED BRAKE SURFACE

Patentierte XeNTiS XBP Bremsperformance

Die patentierte Bremsfläche von XeNTiS garantiert beste Bremsperformance bei nassen und trockenen Bedingungen. Es kommt zu keinem Verschleiß der Bremsfläche und neben den XeNTiS Bremsbelägen ist auch die Verwendung von Standardbremsbelägen möglich.

Patented XeNTiS XBP brake performance

The patented brake surface guarantees the best braking performance in wet and dry conditions. No wear-out on brake surfaces and in addition to XeNTiS brake pads, the standard brake pads can also be used.

Abb.XBP / figure XBP


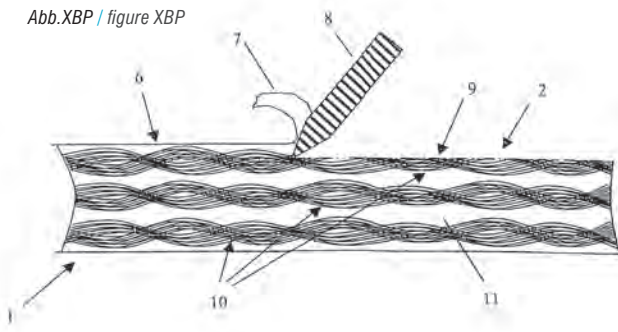


Abb. XBP zeigt die typische Material-Beschaffenheit des Verbundmaterials nach dem Urformprozess in der Felgenflanke vor und nach der erfindungsgemäßen Bearbeitung.

Figure XBP shows the typical nature of the composite material after the primary shaping process in the rim edge before and after processing according to the patented labor process

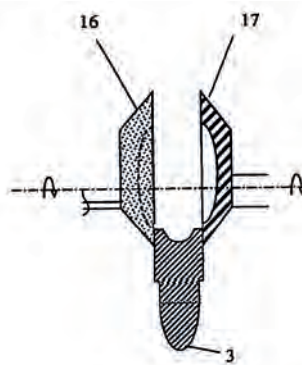

Computerunterstützt verarbeitete optische (vergrößerte) Aufnahme der Oberfläche des Bremsbereiches.

Computer-aided optically processed (enlarged) image of the surface of the brake sector.




- 1 Felge / rim
- 2 Bremsbereich / brake sector
- 3 Felgenkörper / rim body
- 6 Oberfläche des Bremsbereiches (vor der mech. Bearbeitung) / surface of brake sector (before mechanical processing)
- 7 Span / blade
- 8 Spanwerkzeug (Keil) / cutting tool (wedge)
- 9 mechanisch veredelte Oberfläche / mechanically refined surface
- 10 Carbonfaser / carbon fiber
- 11 Kunstharz / synthetic resin
- 16 Schleifscheiben (topfförmig) / grinding disc (cup-shaped)
- 17 Schnitt durch Schleifscheibe / profile of grinding disc



Patentierte Bremsfläche / Patented braking surface



XeNTiS ACTIVE TURBULATOR

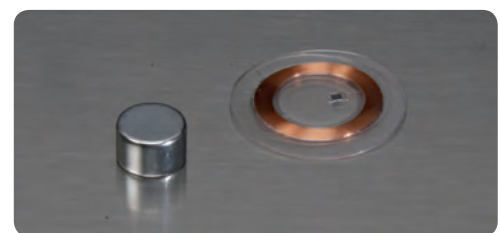

Tachomagnet & RFID chip / Tachometer magnet & RFID system

HARD FACTS

XBP

Die patentierte Bremsfläche von XeNTiS garantiert beste Bremsperformance bei nassen und trockenen Bedingungen. Es kommt zu keinem Verschleiß der Bremsfläche

The patented brake surface guarantees the best braking performance in wet and dry conditions. No wear-out on brake surfaces.



XeNTiS verbessert die Aerodynamik durch den ACTIVE TURBULATOR (Welle).

XeNTiS improves aerodynamics using the ACTIVE TURBULATOR (Wave)

RFID


XeNTiS Wheels werden zu 100% in Österreich gefertigt und verfügen über einen RFID Chip. Dieser garantiert die Nachverfolgbarkeit sowie Herkunft und Herstellung.

XeNTiS wheels are 100% hand made in Austria. All wheels are fitted with a unique RFID chip that allow exact information to be traced and extracted such as origin and manufacturing specifications.



XeNTiS Squad und Monocoque Wheels werden lackiert und sind daher UV-beständig.

XeNTiS Squad and monocoque wheels are coated and therefore UV protected.



XeNTiS Wheels sind alle ausbalanciert und verfügen über einen integrierten Tachomagneten. (kein Tachomagnet in den Modellen XBL 2.5 und SQUAD 2.5)

XeNTiS wheels are harmonically balanced and feature an integrated tachometer magnet. (No tachometer magnet in XBL 2.5 and SQUAD 2.5)



Aufgrund von XeNTiS Spezialbohrungen im Inneren der Felge wird eine sehr hohe Haltbarkeit und eine optimale und langlebige Kraftübertragung garantiert. Durch diese Bearbeitung wird das Eindringen von Wasser in die Felge verhindert.

Due to the XeNTiS offset holes inside the rim, the durability of XeNTiS wheels is very high. These holes guarantee an optimal and durable power transfer and this process prevents penetration of water into the rim.

XBL Clincher Carbon**SQUAD Silver Line**

XBL ist perfekt für Einsteiger, die ein Allround-Laufrad mit XeNTiS Technologie handmade in Austria erleben wollen.

In gewohnt hoher Qualität bietet XeNTiS mit dem neuen 1.222 Gramm leichten XBL 2.5 Clincher Carbon auch Einsteigern im Triathlon mit dem XBL 5.8 und Straßenradsport mit dem XBL 4.2 ein Carbon wheel Set an.

Auf wichtige Produkteigenschaften wie Steifigkeit, Stabilität und die patentierte Bremsperformance (XBP) können sich die Athleten auch beim XBL Carbon wheel Sets verlassen.

XBL is perfect for beginners, and for those that want to experience an all-purpose wheel with XeNTiS Technology hand-made in Austria.

In the usual high quality, XeNTiS offers a new 1,222 gram XBL 2.5 Clincher Carbon wheelset for triathlon beginners.

Important product properties such as stiffness, stability and the patented Braking performance (XBP) guarantee that athletes can rely on the XBL Carbon wheel sets.

Mit verbesserter Aerodynamik durch eine veränderte Felgenkontur und einer verbesserten Eigensteifigkeit überzeugen die neuen XeNTiS SQUAD Silver Line Laufräder mit neu entwickelten Naben auf der ganzen Linie.

Breitere Felgenringe beim Squad 2.5, 4.2, 5.8 und 7.5 (von 20 auf 24,6 mm) sorgen für optimale Harmonie auch bei breiteren Reifen.

Das Highlight ist eine neu entwickelten Vollcarbonnabe für das Vorderrad.

Die Nabe mit kompletten Carbon Gehäuse überzeugt mit erhöhter Steifigkeit bei einem Gewicht von nur 59 Gramm.

Damit sorgt die XeNTiS Carbonnabe für ein agileres und stabileres Fahrgefühl.

Beim Hinterrad kommt die neuentwickelte Nabe XH003 zum Einsatz.

Das Gewicht konnte auch hier nochmals reduziert werden und danke einer 2:1 Einspeichung sorgt dies für eine ausgeglichene Spannung der Speichen.

With improved aerodynamics due to an altered rim contour and improved rigidity, the new XeNTiS SQUAD Silver Line wheels also feature newly developed hubs across the board. The wider rims for Squad 2.5, 4.2, 5.8 and 7.5 (from 20 to 24.6 mm) ensure optimum harmony also with wider tires. The highlight is a newly developed full carbon hub for the front wheel.

The hub has a complete carbon housing that offers extreme stiffness and weighs in at only 59 grams. These features ensure that the XeNTiS carbon hub offers a more agile and stable ride.

The newly developed XH003 hub is used for the rear wheel. The weight reduction is due to the 2:1 spoke lacing which provides a very balanced spoke tension.

	XBL	SQUAD Silver Line
Naben Set / hub set:	XH001	XH003
Felgentiefe / rim depth:	2.5, 4.2, 5.8	2.5, 4.2, 5.8, 7.5
Speichen / spokes:	Sapim CX-Ray	Sapim CX-Ray
Carbonfaser / carbon fiber:	12k	UD
Oberfläche / surface:	glänzend poliert / bright polished	matt lackiert / matt coated (UV Schutz / UV protection)
Aufkleber / decal:	selbstklebend / self-adhesive	überlackiert / recoated

XeNTiS Naben

Die XeNTiS Entwicklung beschränkt sich nicht nur auf die Produktion hochwertiger Carbonlaufräder, sondern erstreckt sich auch auf die Entwicklung und Herstellung hauseigener Naben.

Langzeittest, Prüfstandtest und letztendlich Renneinsätze, tragen zum Ergebnis bei.

XeNTiS hubs

The XeNTiS development is not limited to the production of high quality carbon wheels, but also extends to the development and manufacture of in-house hubs. Long-term tests, bench testing and ultimately racing commitments contribute to the excellent results.

XeNTiS hub: XH001	specifications front wheel	specifications rear wheel
		
surface	black mat anodized or white mat anodized	
range of use	ROAD XBL	
quick release	QR5-100 mm	QR5-130 mm
body material	aluminium	aluminium
hub flange	straight pull	straight pull left / standard flange right
axle	Ø 15 mm aluminium axle	Ø 15 mm aluminium axle
ball bearing	2 ball bearings, sealed twice	4 ball bearings, sealed twice
compatibility		Campagnolo 9/10/11-Speed
		Shimano 9/10/11-Speed
		SRAM 10/11-Speed
weight from	95 g	205 g

XeNTiS hub: XH002	specifications front wheel	specifications rear wheel
		
surface	black mat anodized or white mat anodized	
range of use	ROAD DISC BRAKE XBL / ROAD DISC BRAKE SQUAD Silver Line / SQUAD MTB / KAPPA 2	
quick release	QR5-100 mm, QR9-100 mm, QR10-100 mm, QR12-100 mm, QR15-100 mm, RS1-110 mm	QR5-135 mm, X10-135 mm, X12-135 mm, X12-142 mm
body material	aluminium	aluminium
hub flange	straight pull	straight pull
disc brake adaptor	6-hole IS 2000	6-hole IS 2000
axle	Ø 15 mm aluminium axle	Ø 17 mm aluminium axle
ball bearing	2 ball bearings, sealed twice	4 ball bearings, sealed twice
compatibility		Campagnolo 9/10/11-Speed
		Shimano - SRAM 9/10/11-Speed
		SRAM XX1
weight from	114 g	212 g

XeNTIS hub: XH003	specifications front wheel	specifications rear wheel
		
surface	clear coated	black anodized
range of use	ROAD SQUAD Silver Line	
quick release	QR5-100 mm	QR5-130 mm
body material	Carbon	aluminium
hub flange	straight pull	straight pull
axle	Ø 15 mm aluminium axle	Ø 17 mm aluminium axle
ball bearing	2 ball bearings, sealed twice	4 ball bearings, sealed twice
compatibility		Campagnolo 9/10/11-Speed
		Shimano - SRAM 9/10/11-Speed
weight from	59 g	190 g

XeNTIS hub: XH002 LE	specifications front wheel	specifications rear wheel
		
surface	black mat anodized or white mat coated	
range of use	SQUAD MTB Lefty	
quick release	Lefty Super Max 2.0	QR5-135 mm, X10-135 mm, X12-135 mm, X12-142 mm
body material	aluminium	aluminium
hub flange	straight pull	straight pull
disc brake adaptor	6-hole IS 2000	6-hole IS 2000
axle	-	Ø 17 mm aluminium axle
ball bearing	2 ball bearings, sealed twice	4 ball bearings, sealed twice
compatibility		Campagnolo 9/10/11-Speed
		Shimano - SRAM 9/10/11-Speed
		SRAM XX1
weight from	110 g	212 g

XeNTiS hub: XH002 BO	specifications front wheel	specifications rear wheel
		
surface	black mat anodized or white mat coated	
range of use	SQUAD MTB Boost	
quick release	QR15-110 mm	X12-148 mm
body material	aluminium	aluminium
hub flange	straight pull	straight pull
disc brake adaptor	6-hole IS 2000	6-hole IS 2000
axle	Ø 15 mm aluminium axle	Ø 17 mm aluminium axle
ball bearing	2 ball bearings, sealed twice	4 ball bearings, sealed twice
compatibility		Campagnolo 9/10/11-Speed
		Shimano - SRAM 9/10/11-Speed
		SRAM XX1
weight from	120 g	230 g

XeNTiS hub: XMT	specifications front wheel	specifications rear wheel
		
range of use	Mark1 TT, Mark2 TT	Mark2 TT DISC
quick release	QR5-100 mm	QR5-130 mm
axle	Ø 10 mm aluminium axle	Ø 15 mm aluminium axle
ball bearing	2 ball bearings, sealed twice	4 ball bearings, sealed twice
compatibility		Campagnolo 9/10/11-Speed
		Shimano - SRAM 9/10/11-Speed
weight from	55 g	120 g

XeNTiS hub: XMT TRACK	specifications front wheel	specifications rear wheel
range of use	Mark2 TT TRACK	
quick release	M9 - 142 mm solid axle	M10 - 164 mm solid axle
axle	solid axle TRACK DURA ACE	solid axle TRACK DURA ACE
ball bearing	stainless steel, cone	stainless steel, cone
compatibility		BSA
weight from	120 g	160 g

TRIA

MARK2 TT

MARK2 TT DISC

MARK2 TT TRACK

AERODYNAMIC					CROSS WIND STABILITY					ATHLET				
Low					Stable					Beginner				
High					Unstable					Professional				

	MARK2 TT Clincher Carbon		MARK2 TT Tubular Carbon		MARK2 TT Track		MARK2 TT Track	
								
Design	SHINY WHITE / MATT WHITE / MATT BLACK		SHINY WHITE / MATT WHITE / MATT BLACK		SHINY WHITE / MATT WHITE / MATT BLACK		SHINY WHITE / MATT WHITE / MATT BLACK	
Carbon fiber	12K-Carbon		12K-Carbon		12K-Carbon		12K-Carbon	
dimension:	622 x 17C ETRTO		28" x 24,6 ETRTO		28" x 24,6 ETRTO		28" x 24,6 ETRTO	
tyres	clincher 21-622 to 25-622		tubular 28" (21 to 28 mm)		tubular 28" (21 to 28 mm)		tubular 28" (21 to 28 mm)	
tire inflation pressure:	9,5 bar (21-622)/ 136 psi in 21-622		220 psi		220 psi		220 psi	
	9,0 bar (22-622)/130 psi in 22-622							
	9,0 bar (23-622)/130 psi in 23-622							
	7,5 bar (25-622)/116 psi in 25-622							
braking surface:	XBP CARBON (patented)		XBP CARBON (patented)		none		none	
rim width:	24,6 mm		24,6 mm		24,6 mm		24,6 mm	
rim depth:	65 mm		65 mm		65 mm		65 mm	
spokes count:	5		5		5		5	
hub front / rear:	XeNTiS XMT		XeNTiS XMT		XeNTiS XMT-TRACK		XeNTiS XMT-TRACK	
compatibility:	Campagnolo 9/10/11-Speed		Campagnolo 9/10/11-Speed					
	Shimano 9/10/11-Speed		Shimano 9/10/11-Speed					
	SRAM 10/11-Speed		SRAM 10/11-Speed					
accessories:	XeNTiS warranty card / XeNTiS quick release / XeNTiS Rim tape		XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS quick release / XeNTiS valve extenders for SV		XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS quick release / XeNTiS valve extenders for SV		XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS quick release / XeNTiS valve extenders for SV	
weight per set:	SHINY WHITE: 1816 g		SHINY WHITE: 1700 g / MATT WHITE: 1680 g / MATT BLACK: 1680 g		SHINY WHITE: 1820 g		MATT WHITE: 1800 g	
	MATT WHITE / MATT BLACK: 1794 g							
max. combined weight:	120 kg		120 kg		120 kg		120 kg	

	MARK2 TT DISC Clincher Carbon	MARK2 TT DISC Tubular Carbon
		
Design	SHINY WHITE / MATT WHITE / MATT BLACK	
Carbon fiber	12K-Carbon	12K-Carbon
dimension:	622 x 17C ETRTO	28" x 24,6 ETRTO
tyres	clincher 21-622 to 25-622	tubular 28" (21 to 28 mm)
tire inflation pressure:	9,5 bar (21-622)/ 136 psi in 21-622	220psi
	9,0 bar (22-622)/130 psi in 22-622	
	9,0 bar (23-622)/130 psi in 23-622	
	7,5 bar (25-622)/116 psi in 25-622	
braking surface:	XBP CARBON (patented)	XBP CARBON (patented)
rim width:	24,6 mm 	24,6 mm 
rim depth:	Disc	Disc
spokes count:	-	-
hub rear:	XeNTiS XH003	XeNTiS XH003
compatibility:	Campagnolo 9/10/11-Speed	Campagnolo 9/10/11-Speed
	Shimano 9/10/11-Speed	Shimano 9/10/11-Speed
	SRAM 10/11-Speed	SRAM 10/11-Speed
accessories:	XeNTiS warranty card / XeNTiS quick release / XeNTiS Rim tape	XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS quick release / XeNTiS valve extenders for SV
weight per set:	SHINY WHITE: 1040 g	SHINY WHITE: 820 g
	MATT WHITE / MATT BLACK: 1000 g	MATT WHITE / MATT BLACK: 780 g
max. combined weight:	120 kg	120 kg

ROAD

XBL 2.5

XBL 4.2

XBL 5.8

AERODYNAMIC

Low	High

CROSS WIND STABILITY

Stable	Unstable

ATHLET

Beginner	Professional

	XBL 2.5 Clincher Carbon	XBL 2.5 Clincher Carbon	XBL 4.2 Clincher Carbon	XBL 4.2 Tubular Carbon
Design	WHITE	ALL BLACK	WHITE (ALL BLACK)	ALL BLACK (WHITE)
Carbon fiber	12K-Carbon	12K-Carbon	12K-Carbon	12K-Carbon
dimension:	622 x 13C ETRTO	622 x 13C ETRTO	622 x 13C ETRTO	28" x 20 ETRTO
tyres	clincher 18-622 to 25-622	clincher 18-622 to 25-622	clincher 18-622 to 25-622	tubular 28" 20-25mm
tire inflation pressure:	10,0 bar (18-622)/145 psi in 18-622	10,0 bar (18-622)/145 psi in 18-622	10,0 bar (18-622)/145 psi in 18-622	220 psi
	9,5 bar (21-622)/ 136 psi in 21-622	9,5 bar (21-622)/ 136 psi in 21-622	9,5 bar (21-622)/ 136 psi in 21-622	
	9,0 bar (22-622)/130 psi in 22-622	9,0 bar (22-622)/130 psi in 22-622	9,0 bar (22-622)/130 psi in 22-622	
	9,0 bar (23-622)/130 psi in 23-622	9,0 bar (23-622)/130 psi in 23-622	9,0 bar (23-622)/130 psi in 23-622	
	7,5 bar (25-622)/116 psi in 25-622	7,5 bar (25-622)/116 psi in 25-622	7,5 bar (25-622)/116 psi in 25-622	
braking surface:	XBP CARBON (patented)	XBP CARBON (patented)	XBP CARBON (patented)	XBP CARBON (patented)
rim width:	20 mm 	20 mm 	20 mm 	20 mm
rim depth:	25 mm 	25 mm 	42 mm 	42 mm
spokes count:	20/24	20/24	20/24	20/24
hub front / rear:	XeNTiS XH001-W / B	XeNTiS XH001-W / B	XeNTiS XH001-W / B	XeNTiS XH001-W / B
compatibility:	Campagnolo 9/10/11-Speed	Campagnolo 9/10/11-Speed	Campagnolo 9/10/11-Speed	Campagnolo 9/10/11-Speed
	Shimano 9/10/11-Speed	Shimano 9/10/11-Speed	Shimano 9/10/11-Speed	Shimano 9/10/11-Speed
	SRAM 10/11-Speed	SRAM 10/11-Speed	SRAM 10/11-Speed	SRAM 10/11-Speed
accessories:	XeNTiS warranty card / XeNTiS quick release / XeNTiS Rim tape	XeNTiS warranty card / XeNTiS quick release / XeNTiS Rim tape	XeNTiS warranty card / XeNTiS quick release / XeNTiS Rim tape	XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS quick release / XeNTiS valve extenders for SV
weight per set:	WHITE: 1222 g	ALL BLACK: 1222 g	WHITE: 1406 g / ALL BLACK: 1406 g	WHITE: 1250 g / ALL BLACK: 1250 g
max. combined weight:	85 kg	85 kg	100 kg	110 kg

	XBL 5.8 Clincher Carbon	XBL 5.8 Clincher Carbon
		
Design	WHITE	ALL BLACK
Carbon fiber	12K-Carbon	12K-Carbon
dimension:	622 x 13C ETRTO	622 x 13C ETRTO
tyres	clincher 18-622 to 25-623	clincher 18-622 to 25-623
tire inflation pressure:	10,0 bar (18-622)/145 psi in 18-622	10,0 bar (18-622)/145 psi in 18-622
	9,5 bar (21-622)/ 136 psi in 21-622	9,5 bar (21-622)/ 136 psi in 21-622
	9,0 bar (22-622)/130 psi in 22-622	9,0 bar (22-622)/130 psi in 22-622
	9,0 bar (23-622)/130 psi in 23-622	9,0 bar (23-622)/130 psi in 23-622
	7,5 bar (25-622)/116 psi in 25-622	7,5 bar (25-622)/116 psi in 25-622
braking surface:	XBP CARBON (patented)	XBP CARBON (patented)
rim width:	20 mm 	20 mm 
rim depth:	58 mm	58 mm
spokes count:	20/24	20/24
hub front / rear:	XeNTiS XH001-W / B	XeNTiS XH001-W / B
compatibility:	Campagnolo 9/10/11-Speed	Campagnolo 9/10/11-Speed
	Shimano 9/10/11-Speed	Shimano 9/10/11-Speed
	SRAM 10/11-Speed	SRAM 10/11-Speed
accessories:	XeNTiS warranty card / XeNTiS quick release / XeNTiS Rim tape	XeNTiS warranty card / XeNTiS quick release / XeNTiS Rim tape
weight per set:	WHITE: 1505 g	ALL BLACK: 1505 g
max. combined weight:	100 kg	100 kg

ROAD	AERODYNAMIC				CROSS WIND STABILITY				ATHLET			
	Low		High		Stable		Unstable		Beginner		Professional	
Squad 2.5 Silver Line												
Squad 4.2 Silver Line												
Squad 5.8 Silver Line												
Squad 7.5 Silver Line												

	SQUAD 2.5 Tubular Carbon Silver Line	SQUAD 2.5 Clincher Carbon Silver Line	SQUAD 4.2 Tubular Carbon Silver Line	SQUAD 4.2 Clincher Carbon Silver Line
				
Design	MATT WHITE (MATT BLACK)	MATT BLACK (MATT WHITE)	MATT WHITE (MATT BLACK)	MATT BLACK (MATT WHITE)
Carbon fiber	UD-Carbon	UD-Carbon	UD-Carbon	UD-Carbon
dimension:	28" x 24,6 ETRTO	622 x 17C ETRTO	28" x 24,6 ETRTO	622 x 17C ETRTO
tyres	tubular 28" 21-28mm	clincher 21-25mm	tubular 28" 21-28mm	clincher 21-25mm
tire inflation pressure:	220 psi	9,5 bar (21-622)/ 136 psi in 21-622	220 psi	9,5 bar (21-622)/ 136 psi in 21-622
		9,0 bar (22-622)/130 psi in 22-622		9,0 bar (22-622)/130 psi in 22-622
		9,0 bar (23-622)/130 psi in 23-622		9,0 bar (23-622)/130 psi in 23-622
		7,5 bar (25-622)/116 psi in 25-622		7,5 bar (25-622)/116 psi in 25-622
braking surface:	XBP CARBON (patented)	XBP CARBON (patented)	XBP CARBON (patented)	XBP CARBON (patented)
rim width:	24,6 mm	24,6 mm	24,6 mm	24,6 mm
rim depth:	25 mm	25 mm	42 mm	42 mm
spokes count:	20/24 (2:1)	20/24 (2:1)	20/24 (2:1)	20/24 (2:1)
hub front / rear:	XeNTiS XH003-Carbon / XH003 ALU	XeNTiS XH003-Carbon / XH003 ALU	XeNTiS XH003-Carbon / XH003 ALU	XeNTiS XH003-Carbon / XH003 ALU
compatibility:	Campagnolo 9/10/11-Speed	Campagnolo 9/10/11-Speed	Campagnolo 9/10/11-Speed	Campagnolo 9/10/11-Speed
	Shimano 9/10/11-Speed	Shimano 9/10/11-Speed	Shimano 9/10/11-Speed	Shimano 9/10/11-Speed
	SRAM 10/11-Speed	SRAM 10/11-Speed	SRAM 10/11-Speed	SRAM 10/11-Speed
accessories:	XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS quick release	XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS quick release / XeNTiS Rim tape	XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS quick release / XeNTiS valve extenders for SV	XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS quick release / XeNTiS Rim tape
weight per set:	MATT WHITE: 995 g / MATT BLACK: 995 g	MATT WHITE: 1220 g / MATT BLACK: 1220 g	MATT WHITE: 1173 g / MATT BLACK: 1173 g	MATT WHITE: 1360 g / MATT BLACK: 1360 g
max. combined weight:	100 kg	90 kg	110 kg	100 kg

	SQUAD 5.8 Tubular Carbon Silver Line	SQUAD 5.8 Clincher Carbon Silver Line	SQUAD 7.5 Clincher Carbon Silver Line	SQUAD 7.5 Clincher Carbon Silver Line
				
Design	MATT WHITE (MATT BLACK)	MATT BLACK (MATT WHITE)	MATT WHITE	MATT BLACK
Carbon fiber	UD-Carbon	UD-Carbon	UD-Carbon	UD-Carbon
dimension:	28" x 24,6 ETRTO	622 x 17C ETRTO	622 x 17C ETRTO	622 x 17C ETRTO
tyres	tubular 28" 21-28mm	clincher 21-25mm	clincher 21-25mm	clincher 21-25mm
tire inflation pressure:	220 psi	9,5 bar (21-622)/ 136 psi in 21-622	9,5 bar (21-622)/ 136 psi in 21-622	9,5 bar (21-622)/ 136 psi in 21-622
		9,0 bar (22-622)/130 psi in 22-622	9,0 bar (22-622)/130 psi in 22-622	9,0 bar (22-622)/130 psi in 22-622
		9,0 bar (23-622)/130 psi in 23-622	9,0 bar (23-622)/130 psi in 23-622	9,0 bar (23-622)/130 psi in 23-622
		7,5 bar (25-622)/116 psi in 25-622	7,5 bar (25-622)/116 psi in 25-622	7,5 bar (25-622)/116 psi in 25-622
braking surface:	XBP CARBON (patented)	XBP CARBON (patented)	XBP CARBON (patented)	XBP CARBON (patented)
rim width:	24,6 mm 	24,6 mm 	24,6 mm 	24,6 mm 
rim depth:	58 mm 	58 mm 	75 mm 	75 mm 
spokes count:	20/24 (2:1)	20/24 (2:1)	20/24 (2:1)	20/24 (2:1)
hub front / rear:	XeNTiS XH003-Carbon / XH003 ALU	XeNTiS XH003-Carbon / XH003 ALU	XeNTiS XH003-Carbon / XH003 ALU	XeNTiS XH003-Carbon / XH003 ALU
compatibility:	Campagnolo 9/10/11-Speed	Campagnolo 9/10/11-Speed	Campagnolo 9/10/11-Speed	Campagnolo 9/10/11-Speed
	Shimano 9/10/11-Speed	Shimano 9/10/11-Speed	Shimano 9/10/11-Speed	Shimano 9/10/11-Speed
	SRAM 10/11-Speed	SRAM 10/11-Speed	SRAM 10/11-Speed	SRAM 10/11-Speed
accessories:	XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS quick release / XeNTiS valve extenders for SV	XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS quick release / XeNTiS Rim tape	XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS quick release / XeNTiS Rim tape	XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS quick release / XeNTiS Rim tape
weight per set:	MATT WHITE: 1350 g / MATT BLACK: 1350 g	MATT WHITE: 1498 g / MATT BLACK: 1498 g	MATT WHITE: 1755 g	MATT BLACK: 1755 g
max. combined weight:	110 kg	100 kg	100 kg	100 kg

ROAD DISC BRAKE

XBL 4.2 discbrake

Squad 2.5 Discbrake Silver Line

Squad 4.2 Discbrake Silver Line

Squad 5.8 Discbrake Silver Line

AERODYNAMIC					CROSS WIND STABILITY					ATHLET				
Low					Stable					Beginner				
High					Unstable					Professional				

	XBL 4.2 DISC Clincher Carbon		XBL 4.2 DISC Tubular Carbon		SQUAD 2.5 DISC Tubular Carbon Silver Line		SQUAD 2.5 DISC Clincher Carbon Silver Line	
								
Design	WHITE (ALL BLACK)		ALL BLACK (WHITE)		MATT WHITE (MATT BLACK)		MATT BLACK (MATT WHITE)	
Carbon fiber	12K-Carbon		12K-Carbon		UD-Carbon		UD-Carbon	
dimension:	622 x 13C ETRTO		28" x 20 ETRTO		28" x 24,6 ETRTO		622 x 17C ETRTO	
tyres	clincher 18-622 to 25-622		tubular 28" 20-28mm		tubular 28" 21-28 mm		clincher 21-622 to 25-622	
tire inflation pressure:	10,0 bar (18-622)/145 psi in 18-622		220 psi		220 psi		9,5 bar (21-622)/ 136 psi in 21-622	
	9,5 bar (21-622)/ 136 psi in 21-622						9,0 bar (22-622)/130 psi in 22-622	
	9,0 bar (22-622)/130 psi in 22-622						9,0 bar (23-622)/130 psi in 23-622	
	9,0 bar (23-622)/130 psi in 23-622						7,5 bar (25-622)/116 psi in 25-622	
	7,5 bar (25-622)/116 psi in 25-622							
braking surface:	none		none		none		none	
rim width:	20 mm 		20 mm 		24,6 mm 		24,6 mm 	
rim depth:	42 mm		42 mm		25 mm		25 mm	
spokes count:	28/28		28/28		28/28		28/28	
hub front / rear:	XeNTiS XH002-W / B (QR5-100/ QR5-135)		XeNTiS XH002-W / B (QR5-100/ QR5-135)		XeNTiS XH002-W / B (QR5-100/ QR5-135)		XeNTiS XH002-W / B (QR5-100/ QR5-135)	
compatibility:	Campagnolo 9/10/11-Speed		Campagnolo 9/10/11-Speed		Campagnolo 9/10/11-Speed		Campagnolo 9/10/11-Speed	
	Shimano / SRAM 9/10/11-Speed		Shimano / SRAM 9/10/11-Speed		Shimano / SRAM 9/10/11-Speed		Shimano / SRAM 9/10/11-Speed	
	SRAM XX1		SRAM XX1		SRAM XX1		SRAM XX1	
accessories:	XeNTiS warranty card / XeNTiS quick release / XeNTiS Rim tape		XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS quick release / XeNTiS valve extenders for SV		XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS quick release		XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS quick release / XeNTiS Rim tape	
weight per set:	WHITE: 1465 g / ALL BLACK: 1465 g		WHITE: 1360 g / ALL BLACK: 1360 g		MATT WHITE: 1283 g / MATT BLACK: 1283 g		MATT WHITE: 1416 g / MATT BLACK: 1416 g	
max. combined weight:	110 kg		110 kg		100 kg		100 kg	

	SQUAD 4.2 DISC Tubular Carbon Silver Line	SQUAD 4.2 DISC Clincher Carbon Silver Line	SQUAD 5.8 DISC Tubular Carbon Silver Line	SQUAD 5.8 DISC Clincher Carbon Silver Line
				
Design	MATT WHITE (MATT BLACK)	MATT BLACK (MATT WHITE)	MATT WHITE (MATT BLACK)	MATT BLACK (MATT WHITE)
Carbon fiber	UD-Carbon	UD-Carbon	UD-Carbon	UD-Carbon
dimension:	28" x 24,6 ETRTO	622 x 17C ETRTO	28" x 24,6 ETRTO	622 x 17C ETRTO
tyres	tubular 28" 21-28 mm	clincher 21-622 to 25-622	tubular 28" 21-28 mm	clincher 21-622 to 25-622
tire inflation pressure:	220 psi	9,5 bar (21-622)/ 136 psi in 21-622	220 psi	9,5 bar (21-622)/ 136 psi in 21-622
		9,0 bar (22-622)/130 psi in 22-622		9,0 bar (22-622)/130 psi in 22-622
		9,0 bar (23-622)/130 psi in 23-622		9,0 bar (23-622)/130 psi in 23-622
		7,5 bar (25-622)/116 psi in 25-622		7,5 bar (25-622)/116 psi in 25-622
braking surface:	none	none	none	none
rim width:	24,6 mm 	24,6 mm 	24,6 mm 	24,6 mm 
rim depth:	42 mm 	42 mm 	58 mm 	58 mm 
spokes count:	28/28	28/28	28/28	28/28
hub front / rear:	XeNTiS XH002-W / B (QR5-100/ QR5-135)	XeNTiS XH002-W / B (QR5-100/ QR5-135)	XeNTiS XH002-W / B (QR5-100/ QR5-135)	XeNTiS XH002-W / B (QR5-100/ QR5-135)
compatibility:	Campagnolo 9/10/11-Speed	Campagnolo 9/10/11-Speed	Campagnolo 9/10/11-Speed	Campagnolo 9/10/11-Speed
	Shimano / SRAM 9/10/11-Speed	Shimano / SRAM 9/10/11-Speed	Shimano / SRAM 9/10/11-Speed	Shimano / SRAM 9/10/11-Speed
	SRAM XX1	SRAM XX1	SRAM XX1	SRAM XX1
accessories:	XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS quick release / XeNTiS valve extenders for SV	XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS quick release / XeNTiS Rim tape	XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS quick release / XeNTiS valve extenders for SV	XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS quick release / XeNTiS Rim tape
weight per set:	MATT WHITE: 1359 g / MATT BLACK: 1359 g	MATT WHITE: 1457 g / MATT BLACK: 1457 g	MATT WHITE: 1441 g / MATT BLACK: 1441 g	MATT WHITE: 1603 g / MATT BLACK: 1603 g
max. combined weight:	110 kg	110 kg	110 kg	110 kg

MTB

Squad 2.5 MTB 27.5

Squad 3.0 MTB 29

Squad 2.5 MTB 29 CC

Kappa 2 CC 26

Kappa 2 CC 27.5

PERFORMANCE					ATHLET				
Cross Country		All Mountain			Beginner		Professional		

	SQUAD 2.5 MTB 27.5 Clincher Carbon QR5 / QR5	SQUAD 2.5 MTB 27.5 Clincher Carbon QR15 / X12	SQUAD 2.5 MTB 29" CC Clincher Carbon QR5 / QR5	SQUAD 2.5 MTB 29" CC Clincher Carbon QR15 / X12
				
Design	MATT WHITE (MATT BLACK)	MATT BLACK (MATT WHITE)	MATT WHITE (MATT BLACK)	MATT BLACK (MATT WHITE)
Carbon fiber	3K-Carbon	3K-Carbon	3K-Carbon	3K-Carbon
dimension:	584X25C ETRTO 27.5" Tubeless Ready	584X25C ETRTO 27.5" Tubeless Ready	622x20C ETRTO 29" Tubeless Ready	622x20C ETRTO 29" Tubeless Ready
tyres	clincher tyres 47-584 to 60-584	clincher tyres 47-584 to 60-584	clincher tyres 25-622-60-622	clincher tyres 25-622-60-622
tire inflation pressure:	3,5 bar (27,5x1,85 Zoll)/50 psi in 47-584 ETRTO	3,5 bar (27,5x1,85 Zoll)/50 psi in 47-584 ETRTO	6 bar (29x1 Zoll)/87 psi in 25-622 ETRTO	6 bar (29x1 Zoll)/87 psi in 25-622 ETRTO
	3 bar (27,5x2,10 Zoll)/43 psi in 54-584 ETRTO	3 bar (27,5x2,10 Zoll)/43 psi in 54-584 ETRTO	3,5 bar (29x1,75 Zoll)/50 psi in 47-622 ETRTO	3,5 bar (29x1,75 Zoll)/50 psi in 47-622 ETRTO
	2,7bar (27,5x2,25 Zoll)/37 psi in 57-584 ETRTO	2,7bar (27,5x2,25 Zoll)/37 psi in 57-584 ETRTO	3 bar (29x2,10 Zoll)/43 psi in 54-622 ETRTO	3 bar (29x2,10 Zoll)/43 psi in 54-622 ETRTO
	2,4 bar (27,5x2,35 Zoll)/34 psi in 60-584 ETRTO	2,4 bar (27,5x2,35 Zoll)/34 psi in 60-584 ETRTO	2,7bar (29x2,25 Zoll)/37 psi in 57-622 ETRTO	2,7bar (29x2,25 Zoll)/37 psi in 57-622 ETRTO
			2,4 bar (29x2,35 Zoll)/34 psi in 60-622 ETRTO	2,4 bar (29x2,35 Zoll)/34 psi in 60-622 ETRTO
braking surface:	none	none	none	none
rim width:	30,2 mm	30,2 mm	25,6 mm	25,6 mm
rim depth:	25 mm	25 mm	25 mm	25 mm
spokes count:	28/28	28/28	28/28	28/28
hub front / rear:	XeNTiS XH002-W / B (QR5-100/ QR5-135)	XeNTiS XH002-W / B (QR15-100/ X12-142)	XeNTiS XH002-W / B (QR5-100/ QR5-135)	XeNTiS XH002-W / B (QR15-100/ X12-142)
compatibility:	Shimano 9/10/11-Speed	Shimano 9/10/11-Speed	Shimano 9/10/11-Speed	Shimano 9/10/11-Speed
	SRAM 10-Speed	SRAM 10-Speed	SRAM 10-Speed	SRAM 10-Speed
	SRAM XX1	SRAM XX1	SRAM XX1	SRAM XX1
accessories:	XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS quick release / XeNTiS Rim tape	XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS Rim tape	XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS quick release / XeNTiS Rim tape	XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS Rim tape
weight per set:	MATT WHITE: 1226 g / MATT BLACK: 1226 g	MATT WHITE: 1216 g / MATT BLACK: 1216 g	MATT WHITE: 1295 g / MATT BLACK: 1295 g	MATT WHITE: 1285 g / MATT BLACK: 1285 g
max. combined weight:	90 kg	90 kg	90 kg	90 kg

	SQUAD 3.0 MTB 29" Hoekless Carbon Boost QR15 / X12	SQUAD 3.0 MTB 29" Hoekless Carbon Lefty / X12	KAPPA2 CC 26" QR5 / QR5	KAPPA2 CC 26" QR15 / X12
				
Design	MATT WHITE (MATT BLACK)	MATT BLACK (MATT WHITE)	MATT WHITE	MATT WHITE
Carbon fiber	12K-Carbon	12K-Carbon	12K-Carbon	12K-Carbon
dimension:	622x30,5 ETRTO Hoekless, Tubeless Ready	622x30,5 ETRTO Hoekless, Tubeless Ready	559x19C ETRTO, 26" Tubless Ready	559x19C ETRTO, 26" Tubless Ready
tyres	clincher tyres 54-622-65-622	clincher tyres 25-622-60-622	Clincher tyres 28-559 to 60-559	clincher tyres 28-559 to 60-559
tire inflation pressure:	3,5 bar (29x2,10 Zoll)/52 psi in 54-622 ETRTO	3,5 bar (29x2,10 Zoll)/52 psi in 54-622 ETRTO	6 bar (26x1 Zoll)/87 psi in 25-559 ETRTO	6 bar (26x1 Zoll)/87 psi in 25-559 ETRTO
	3,2 bar (29x2,20 Zoll)/46 psi in 57-622 ETRTO	3,2 bar (29x2,20 Zoll)/46 psi in 57-622 ETRTO	3,5 bar (26x1,85 Zoll)/50 psi in 47-559 ETRTO	3,5 bar (26x1,85 Zoll)/50 psi in 47-559 ETRTO
	2,9 bar (29x2,35 Zoll)/41 psi in 60-622 ETRTO	2,9 bar (29x2,35 Zoll)/41 psi in 60-622 ETRTO	3 bar (26x2,10 Zoll)/43 psi in 54-559 ETRTO	3 bar (26x2,10 Zoll)/43 psi in 54-559 ETRTO
	2,6bar (29x2,50 Zoll)/37 psi in 62-622 ETRTO	2,6bar (29x2,50 Zoll)/37 psi in 62-622 ETRTO	2,7bar (26x2,25 Zoll)/37 psi in 57-559 ETRTO	2,7bar (26x2,25 Zoll)/37 psi in 57-559 ETRTO
	2,5 bar (29x2,60 Zoll)/36 psi in 65-622 ETRTO	2,5 bar (29x2,60 Zoll)/36 psi in 65-622 ETRTO	2,4 bar (26x2,35 Zoll)/34 psi in 60-559 ETRTO	2,4 bar (26x2,35 Zoll)/34 psi in 60-559 ETRTO
braking surface:	none	none	none	none
rim width:	36 mm	36 mm	25,6 mm	25,6 mm
rim depth:	30 mm	30 mm	35 mm	35 mm
spokes count:	28/28	28/28	4	4
hub front / rear:	XeNTiS Boost XH002 BO-W / B (QR5-110/ X12-148)	XeNTiS Lefty XH002 LE-W / B (Lefty SM 2.0 / X12-142)	XeNTiS XH002 (QR5-100 / QR5-135)	XeNTiS XH002 (QR15-100 / X12-142)
compatibility:	Shimano 9/10/11-Speed	Shimano 9/10/11-Speed	Shimano 9/10/11-Speed	Shimano 9/10/11-Speed
	SRAM 10-Speed	SRAM 10-Speed	SRAM 10-Speed	SRAM 10-Speed
	SRAM XX1	SRAM XX1	SRAM XX1	SRAM XX1
accessories:	XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS Rim tape	XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS Rim tape	XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS quick release	XeNTiS warranty card / XeNTiS Wheelbag
weight per set:	MATT WHITE: 1590 g / MATT BLACK: 1590 g	MATT WHITE: 1552 g / MATT BLACK: 1552 g	MATT WHITE: 1317 g	MATT WHITE: 1307 g
max. combined weight:	120 kg	120 kg	120 kg	120 kg

MTB

Squad 2.5 MTB 27.5

Squad 2.5 MTB 29

Squad 2.5 MTB 29 CC

Kappa 2 CC 26

Kappa 2 CC 27.5

	AERODYNAMIC					CROSS WIND STABILITY					ATHLET				
	Low		High			Stable		Unstable			Beginner		Professional		
MTB															
Squad 2.5 MTB 27.5															
Squad 2.5 MTB 29															
Squad 2.5 MTB 29 CC															
Kappa 2 CC 26															
Kappa 2 CC 27.5															

KAPPA2 CC 27,5 QR5 / QR5

KAPPA2 CC 27,5 QR15 / X12



	KAPPA2 CC 27,5 QR5 / QR5	KAPPA2 CC 27,5 QR15 / X12
Design	MATT WHITE	MATT WHITE
Carbon fiber	12K-Carbon	12K-Carbon
dimension:	584x25C ETRTO 27.5" Tubeless Ready	584x25C ETRTO 27.5" Tubeless Ready
tyres	clincher tyres 28-584 to 60-584	clincher tyres 28-584 to 60-584
tire inflation pressure:	3,5 bar (27,5x1,85 Zoll)/50 psi in 47-584 ETRTO 3 bar (27,5x2,10 Zoll)/43 psi in 54-584 ETRTO 2,7bar (27,5x2,25 Zoll)/37 psi in 57-584 ETRTO 2,4 bar (27,5x2,35 Zoll)/34 psi in 60-584 ETRTO	3,5 bar (27,5x1,85 Zoll)/50 psi in 47-584 ETRTO 3 bar (27,5x2,10 Zoll)/43 psi in 54-584 ETRTO 2,7bar (27,5x2,25 Zoll)/37 psi in 57-584 ETRTO 2,4 bar (27,5x2,35 Zoll)/34 psi in 60-584 ETRTO
braking surface:	none	none
rim width:	30,2 mm 	30,2 mm 
rim depth:	35 mm	35 mm
spokes count:	4	4
hub front / rear:	XeNTiS XH002 (QR5-100 / QR5-135)	XeNTiS XH002 (QR15-100 / X12-142)
compatibility:	Shimano 9/10/11-Speed	Shimano 9/10/11-Speed
	SRAM 10-Speed	SRAM 10-Speed
	SRAM XX1	SRAM XX1
accessories:	XeNTiS warranty card / XeNTiS Wheelbag / XeNTiS quick release	XeNTiS warranty card / XeNTiS Wheelbag
weight per set:	MATT WHITE: 1395 g	MATT WHITE: 1385 g
max. combined weight:	120 kg	120 kg

XeNTiS Ersatzteile / XeNTiS spare parts

11XRS001



Body Shimano 11-speed (hub XMT)

11XRC001



Body Campagnolo 11-speed (hub XMT)

14XRS001



Body Shimano 11-speed (hub XH001)

14XRC001



Body Campagnolo 11-speed (hub XH001)

14XRS002



Body Shimano 11-speed (hub XH002-3)

14XRC002



Body Campagnolo 11-speed (hub XH002-3)

14XRX002



Body SRAM XX1 (hub XH002-3)



Ratchet system



Pawl system

XeNTiS Ersatzteile / XeNTiS spare parts

11XSC002



Hub spacer ROAD

13XSC...
14XSC...



Hub spacer MTB

12XQRS001



Quick release (Silver Line)

11XSS001



Spoke tool

13XRT...



Rim tape

12XV-HF20



Valve extension (HF20)

11XBBS...



Ball bearing

12XBBC...



Ball bearing (ceramic)



Freewheel spacer (1,8mm)

11XQR001



Quick release

11S001-



Spoke

11NU001



Spoke nipple

12XV-HF40



Valve extension (HF40)

12XV-HF60



Valve extension (HF60)

11XA006



Axle (Track)

12XBPS001
12XBPC001



XenTiS brake pads

Weitere Ersatzteile auf aAnfrage. / Further spare parts on request.





**11004**

XeNTiS - Fahrrad Handschuhe, strapazierfähige, elastische Obermaterialien

11004

XeNTiS - cycling gloves, sturdy, flexible upper materials

**X0300S**

XeNTiS - Kappe schwarz, atmungsaktiv, Einheitsgröße

X0300S

XeNTiS - cap black, breathable, unisize

**X0300W**

XeNTiS - Kappe weiß, atmungsaktiv, Einheitsgröße

X0300W

XeNTiS - cap white, breathable, unisize

**11003**

XeNTiS - Ärmlinge, 100% Lycra

11003

XeNTiS - arm warmers, 100 % lycra

**11005**

XeNTiS - Fahrrad Socken, atmungsaktiv, 70% Baumwolle, 21% Lycra, 5% Elasthan, 4% Polyamid

11005

XeNTiS - cycling socks, breathable, 70% cotton, 21% lycra, 5% elasthan, 4% polyamid

**11XWHEELBAG1**

XeNTiS - wheel bag, Größe: 81x80x13 cm für 2 Räder mit 2 Fächern und extra Polsterung, extra Innentasche, Befestigungskordel für jedes Rad

11XWHEELBAG1

XeNTiS - wheel bag, size: 81x80x13 cm for 2 wheels with 2 compartments and extra padding, separate inner pocket, fixation cord for each wheel

11XWHEELBAG2

XeNTiS - wheel bag, Größe: 81x80x19 cm für 2 Räder mit 2 Fächern und extra Polsterung, extra Innentasche, Befestigungskordel für jedes Rad

11XWHEELBAG2

XeNTiS - wheel bag, size: 81x80x19 cm for 2 wheels with 2 compartments and extra padding, separate inner pocket, fixation cord for each wheel

NEW
DESIGN



16002

XeNTiS - Trikot kurzarm mit durchgehendem Zipp, aerodynamischer Schnitt, 100% Polyester, Größen S - X

16002

XeNTiS - jersey short sleeves with full zipp, fitted aerodynamically, 100% polyester, sizes S - XL

16001


XeNTiS - Radhose kurz mit Träger, höchste Qualität, 73% Nylon, 27% Spandex, Größen S - XL

16001

XeNTiS - cycling bib shorts, premium quality, 73% nylon, 27% spandex, sizes S - XL

NEW
DESIGN



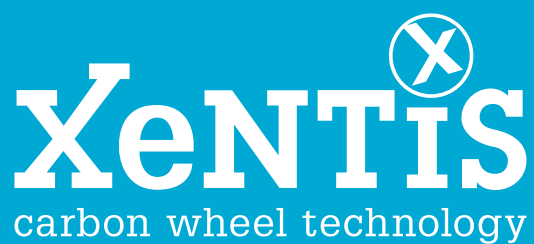

XeNTIS Composite Entwicklungs- und Produktions GmbH
Dr. Niederdorferstraße 25, 8572 Bärnbach, Austria
Tel.: +43 (0)3142-60945-0, Fax: +43 (0)3142-60945-690
office@xentis.com, www.xentis.com

(D/E 08/16) X002DE-17

Pictures: © XeNTIS Composite GmbH

XeNTIS Produkte können Abweichungen enthalten, Spezifikationen können ohne vorherige Ankündigungen geändert werden. Gewichtsschwankungen können aufgrund der Produktionsmethode des Laufrades auftreten. Alle XeNTIS wheels sind in Clincher und Tubular erhältlich. Irrtümer und Änderungen vorbehalten!
XeNTIS products may not be exactly as shown, specifications subject to change without notice. Weight tolerances may occur due to the manufacturing process.
All XeNTIS wheels are available in clincher and tubular version. Errors and omissions excepted!